




Fire Stopper

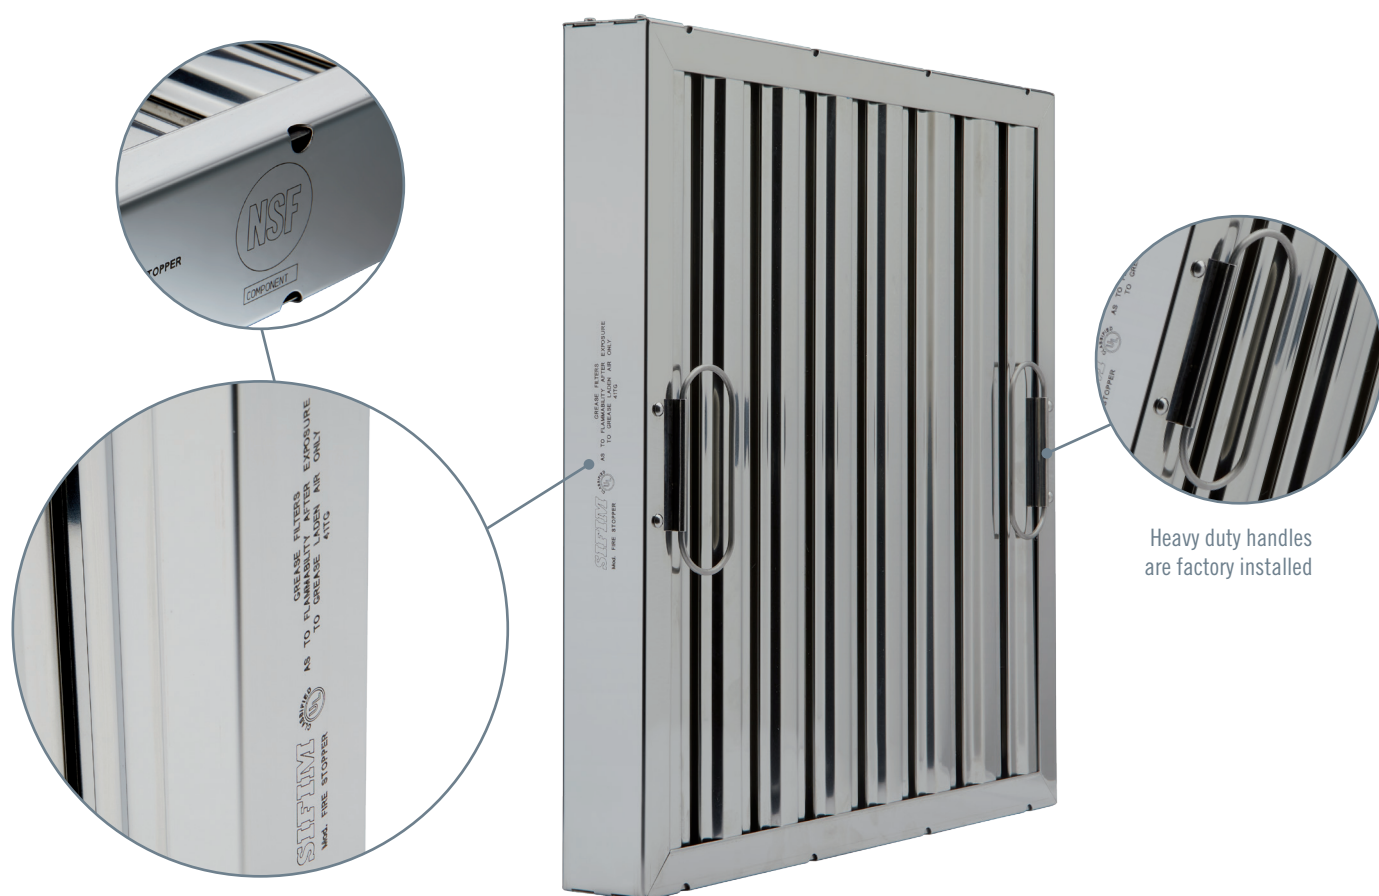

Unique 3 Profile Design

The SIFIM Fire Stopper baffle/grease filter features a unique and advanced labyrinth three profile baffle construction achieving effective removal of heavy grease particles while its smooth surface allows grease collector quick drainage. Designed for maximum durability and manufactured in Italy at our world class ISO certified facility the Fire Stopper is an ideal solution for retrofit applications minimizing maintenance cycles.

Its aesthetically elaborated bright finish appearance makes it an ideal solution for new open commercial kitchen designs.

SIFIM filters are safe and easy to maintain using high temperature dishwashers and approved detergents.

Features and Benefits:

- UL Certified and NSF Approved
- Seamless durable 304 Stainless Steel construction. PVC coated
- Low overall static pressure drop for maximum energy savings and low noise levels
- Safe positive flame barrier protection
- Heavy duty factory installed handles for easy installation and removal

WEIGHT & DIMENSIONS

Model #	Nominal Size	Actual Dimensions			Effective Area	Filter Weight
		Height	Width	Depth		
1940046	10" x 16" x 2"	9" 5/8 244,5 mm	15" 5/8 396,9 mm	1" 7/8 47,6 mm	0,80 ft ² 0,07 m ²	2,7 lbs 1,2 kg
1940048	10" x 20" x 2"	9" 5/8 244,5 mm	19" 5/8 498,5 mm	1" 7/8 47,6 mm	1,03 ft ² 0,10 m ²	3,4 lbs 1,6 kg
1940047	10" x 16" x 2"	11" 5/8 295,3 mm	15" 5/8 396,9 mm	1" 7/8 47,6 mm	1,00 ft ² 0,09 m ²	3,3 lbs 1,5 kg
1940049	12" x 20" x 2"	11" 5/8 295,3 mm	19" 5/8 498,5 mm	1" 7/8 47,6 mm	1,28 ft ² 0,12 m ²	4,2 lbs 1,9 kg
1940042	16" x 16" x 2"	15" 5/8 396,9 mm	15" 5/8 396,9 mm	1" 7/8 47,6 mm	1,39 ft ² 0,13 m ²	4,5 lbs 2,0 kg
1940044	16" x 20" x 2"	15" 5/8 396,9 mm	19" 5/8 498,5 mm	1" 7/8 47,6 mm	1,78 ft ² 0,17 m ²	5,6 lbs 2,5 kg
1940050	16" x 25" x 2"	15" 5/8 396,9 mm	24" 5/8 625,5 mm	1" 7/8 47,6 mm	2,27 ft ² 0,21 m ²	7,0 lbs 3,2 kg
1940043	20" x 16" x 2"	19" 5/8 498,5 mm	15" 5/8 396,9 mm	1" 7/8 47,6 mm	1,78 ft ² 0,17 m ²	5,6 lbs 2,5 kg
1940041	20" x 20" x 2"	19" 5/8 498,5 mm	19" 5/8 498,5 mm	1" 7/8 47,6 mm	2,29 ft ² 0,21 m ²	7,1 lbs 3,2 kg
1940051	20" x 25" x 2"	19" 5/8 498,5 mm	24" 5/8 625,5 mm	1" 7/8 47,6 mm	2,92 ft ² 0,27 m ²	8,9 lbs 4,0 kg

Perimeter Tolerance: $\pm 1/16"$ / $\pm 1,5\text{mm}$

Depth Tolerance: $\pm 1/32"$ / $\pm 0,8\text{mm}$

AIR FLOW CHART

